

■ DATASHEET: AUXILIARY CONTACT H, 1 CO, 250V AC/ 3A, LEFT SNAP-ON MOUNTABLE




■ SCHRACK INFO

- Signal Auxiliary Contact, 1 CO, 250V AC/3A
- Snap-on execution


■ TECHNICAL DATA

Product-standards:	IEC/EN 62019
Contacts:	1 Co
snapped on to:	MP, A, FA, BMS, BOLF, BMA, B-FA
Electric datas	
Rated current I_{th}	3 A
Utilisation category AC-13:	
Rated operation current I_e	3A-AC
Rated operation voltage U_e	250V-AC
Utilisation category AC-15:	
Rated operation current I_e	2A-AC
Rated operation voltage U_e	250V-AC
Utilisation category DC-12 / 110V-DC:	
Rated operation current I_e	0,5A-DC
Rated operation voltage U_e	110V-DC
Rated insulation voltage U_i	250V-AC
Minimum operating voltage per contact U_{min}	5V-AC/DC
Minimum operating current I_{min}	10mA AC/DC, 10mA DC
Mechanical data:	
Width:	0.5 SU (8.8 mm)
Dimension of cap:	45mm
Dimension of socet:	80mm
Shoulder height:	44mm


■ MOUNTING

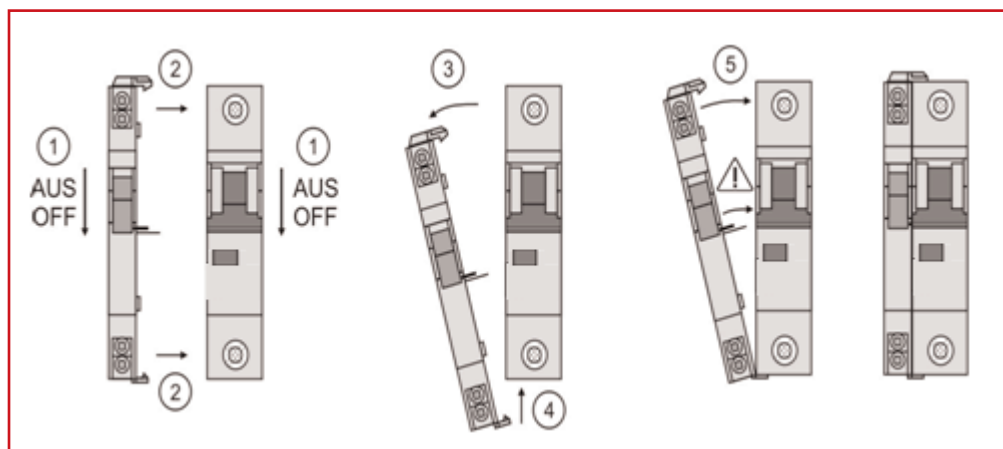

■ WIRING DIAGRAM

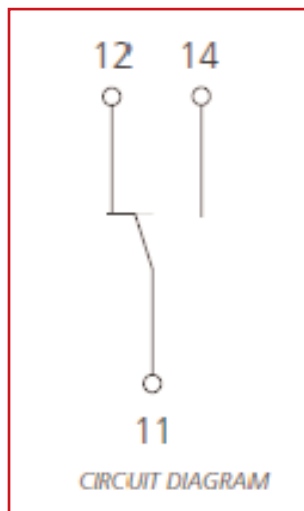

■ DIMENSIONS

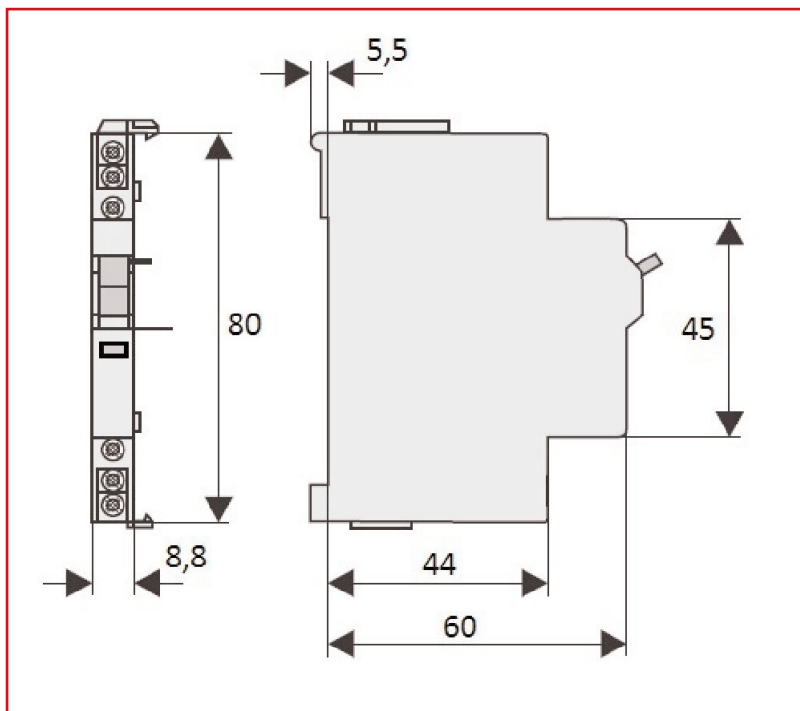

DESCRIPTION	ORDER NO.
Auxiliary Contact H, 1 CO, 250V AC/ 3A, left snap-on mountable	BM900099ME