

■ Datasheet: DIN rail mounted socket outlet with pin for CH, CZ, F




■ SCHRACK-INFO

- Design according to CH, CZ, F
- Wide 2,5 MW


■ Technical datas

Rated voltage	250 V-AC
Satandard	DIN VDE 0620-1:2005, DIN 49 440 Teil 1
Rated current	16 A
Power loss	0,5 W
Front dimension	45 mm
Device height	76 mm
Installation width	44 mm
Weight	0,122 kg
Mounting	Clip for DIN-rail according EN 60715 Screw mounting possible
Degree of protection	IP40
Terminal top and bottom	Lifteklemmen
Terminal capacity	1 bis 2,5 mm ²
Torque	1,2 - 1,5 Nm
Contacts	CuZn 37
Material of cover	Harnstoff-Formmasse Typ 131.5

Wiring diagram



Dimensions

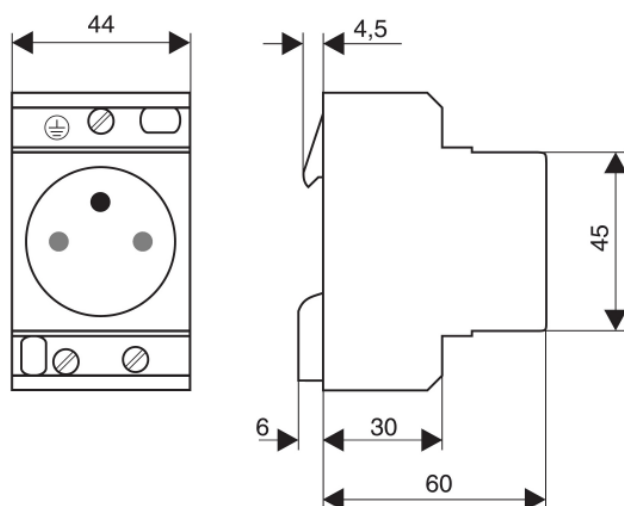

Articles

Description	Type	Article
DIN rail mounted socket outlet with pin; for CH, CZ, F	REG-SD/CZ	BZ325001-A