


SCHRACK TECHNIK

Seybelgasse 13, AT-1230 Vienna








E-Mail: info@schrack.at

Web: www.schrack.com



DE	Montageanleitung	HR	Upute za montažu
FR	Notice d'instructions	HU	Szerelési útmutató
GB	Mounting instructions	LT	Montavimo instrukcija
NL	Montage instructie	LV	Montāžas instrukcija
DK	Monteringsvejledning	PL	Instrukcja montażowa
FI	Asennusohje	RO	Intruțiuni de montare
NO	Montasjeanvisning	SK	Návod na montáž
SE	Monterings instruktioner	RU	Указания по установке
IT	Istruzioni di montaggio	BG	Инструкции за монтаж
ES	Instrucción s de montaje	GR	Οδηγίες χώνευσης
PT	Instrução s de montagem	SI	Navodilo za montažo
CZ	Montážní návod	EE	Paigaldusjuhised
BA	Uputstvo za montažu	IS	Leiðbeiningar
SR	Uputstvo za montažu	AR	دليل التركيب
UK	Інструкції з установки		

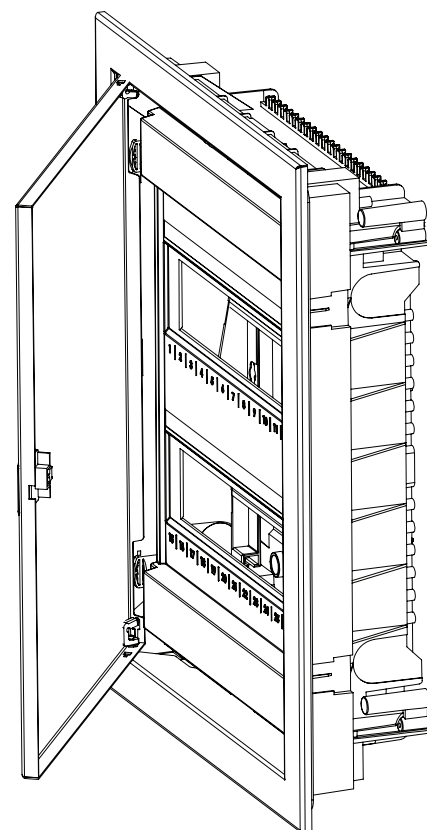


ERC

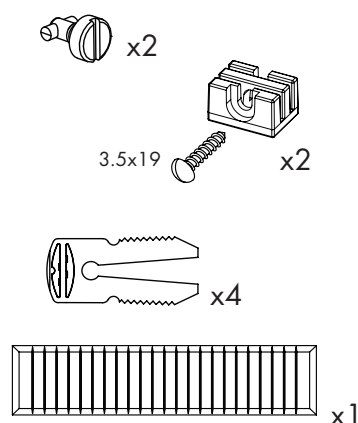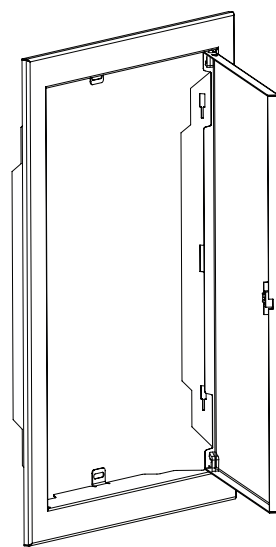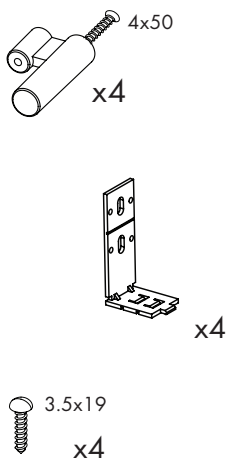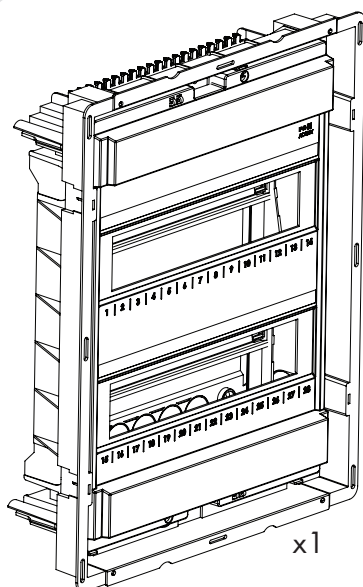

ES, EP






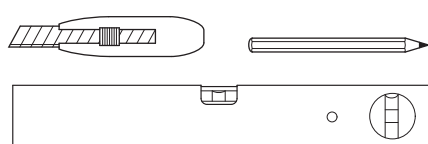








ES






EP






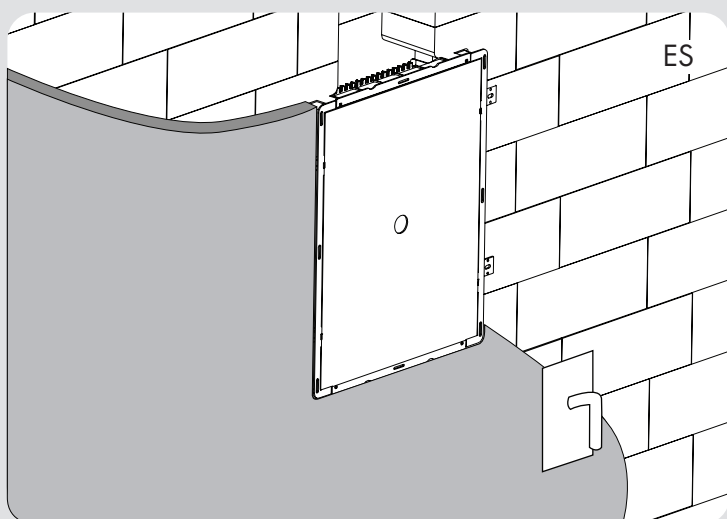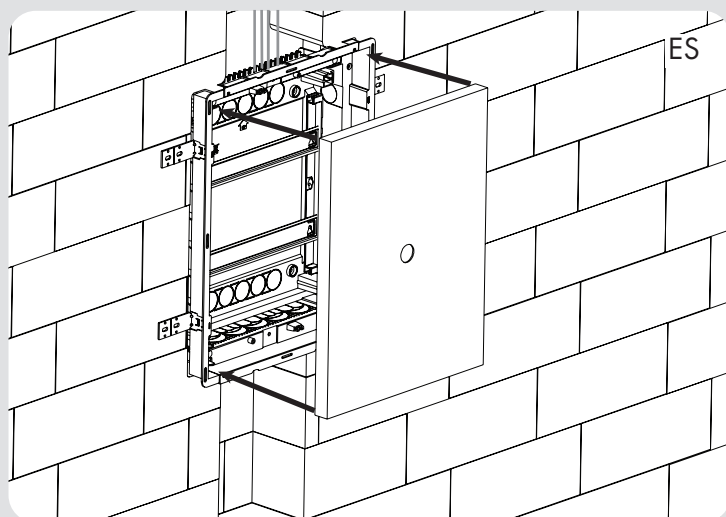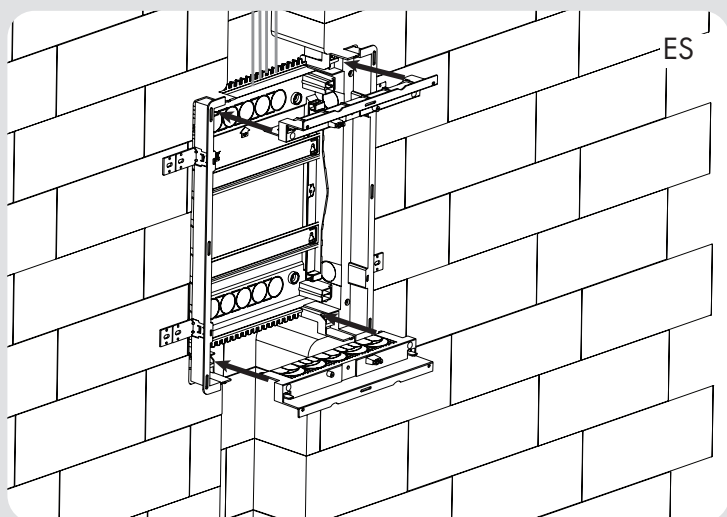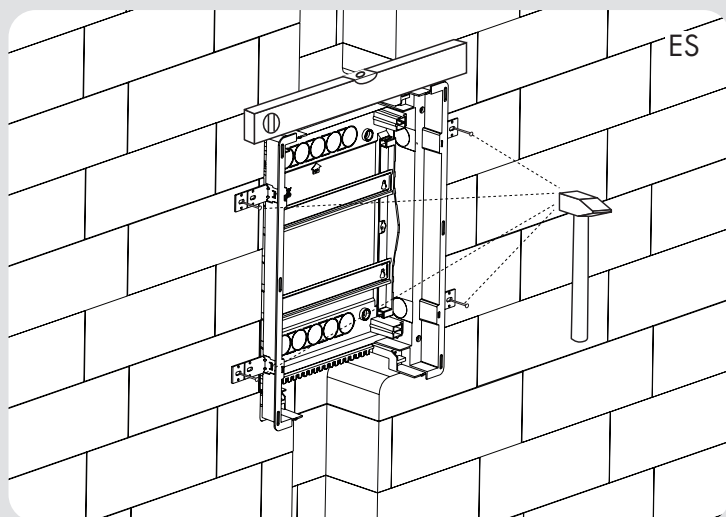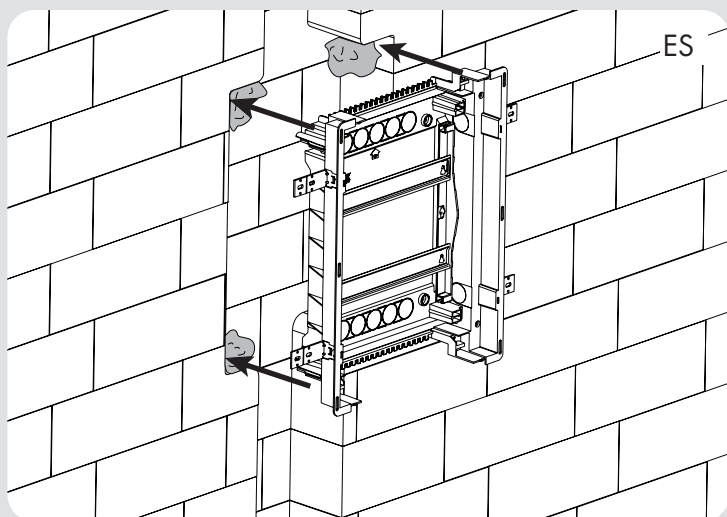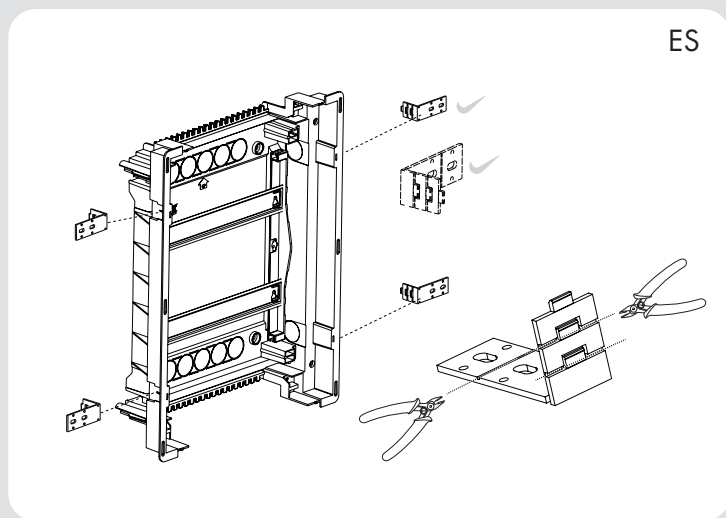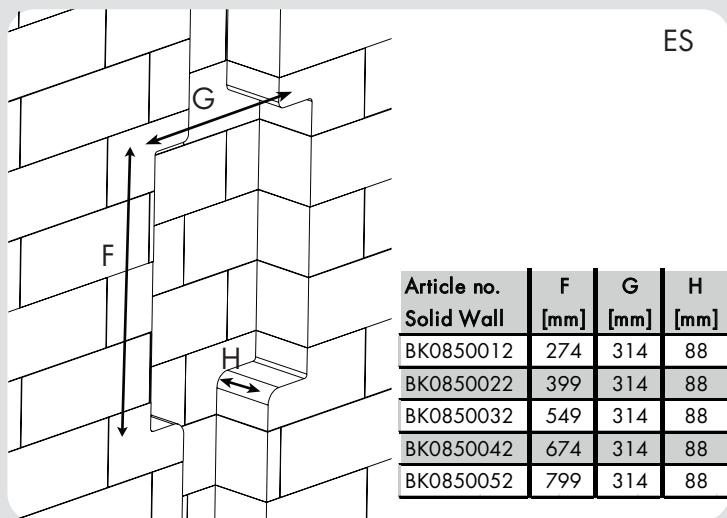

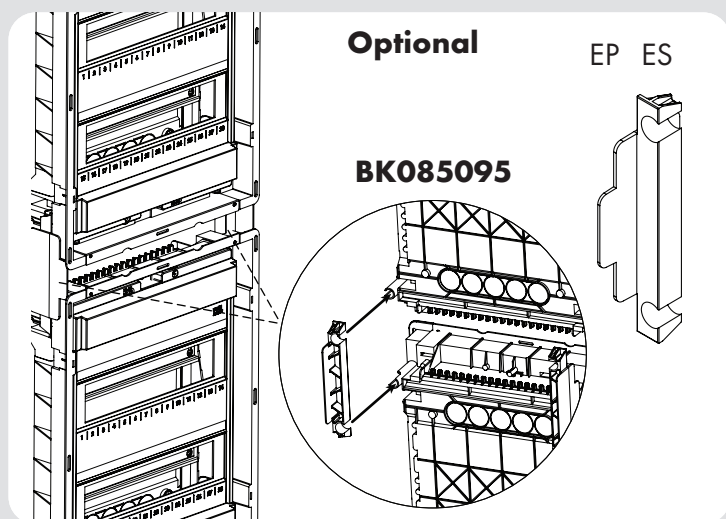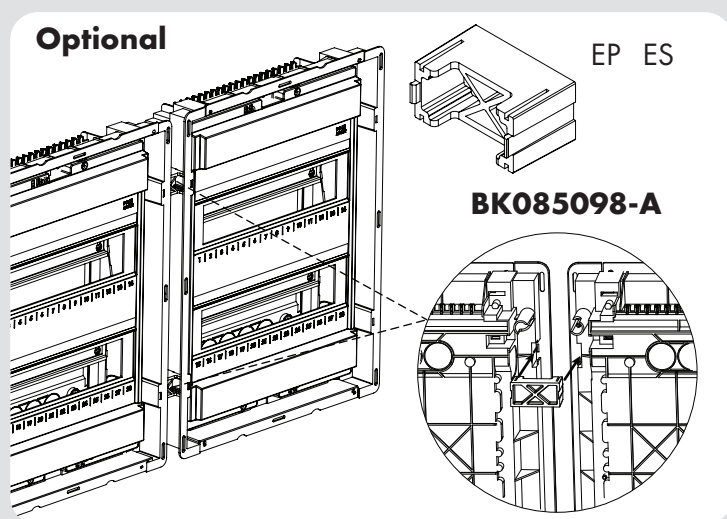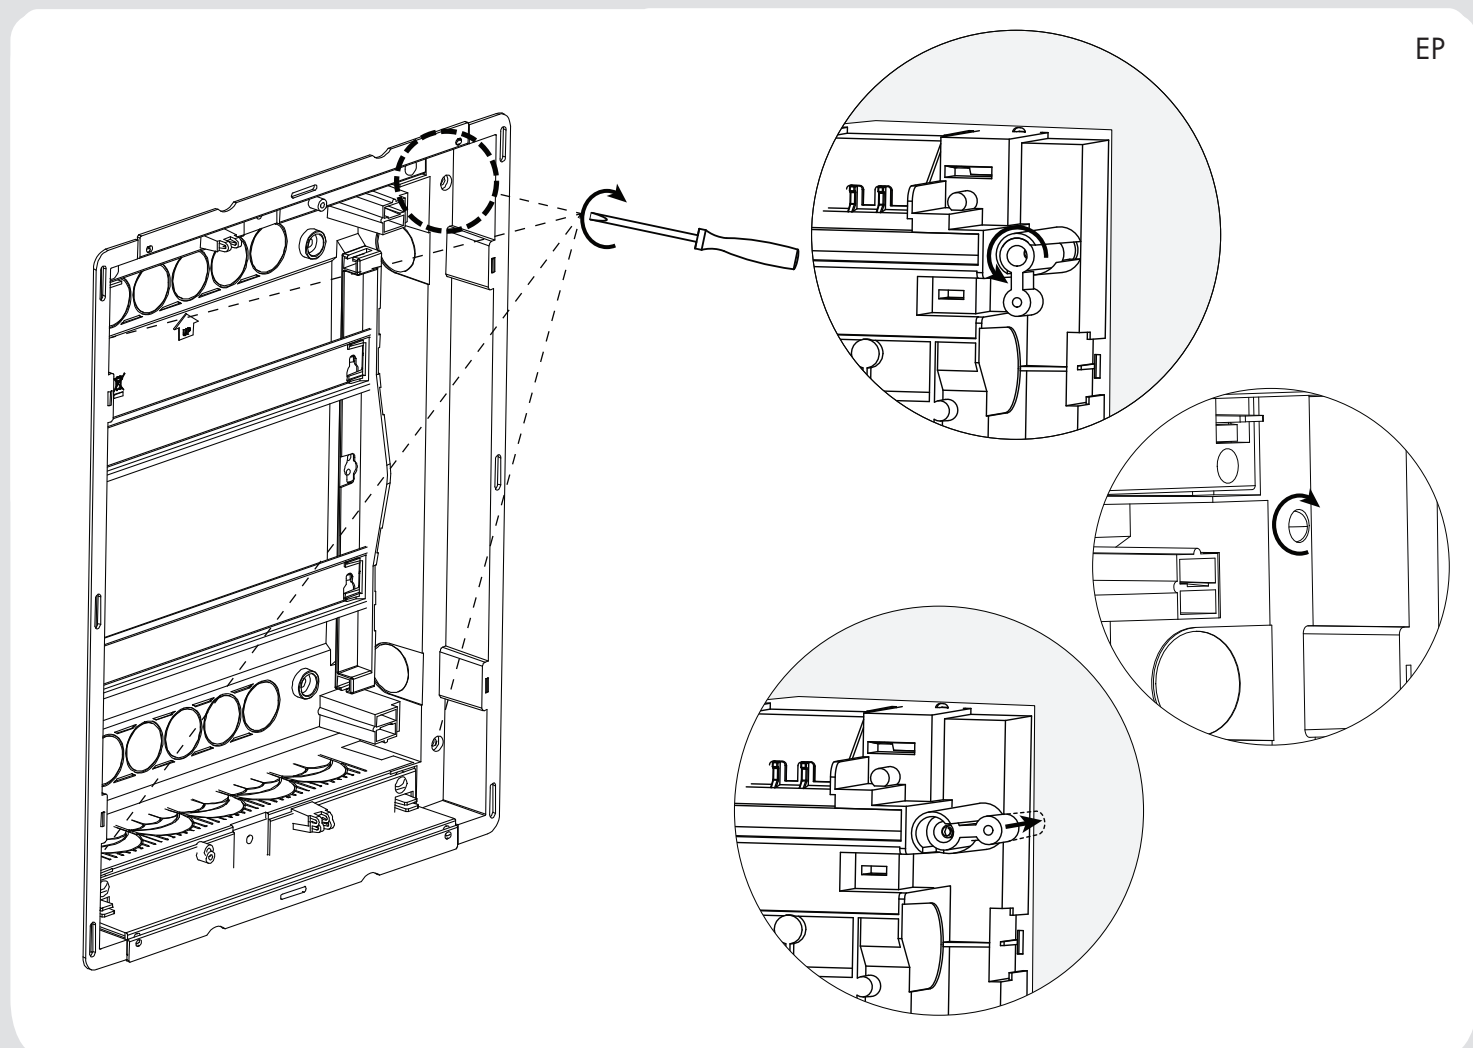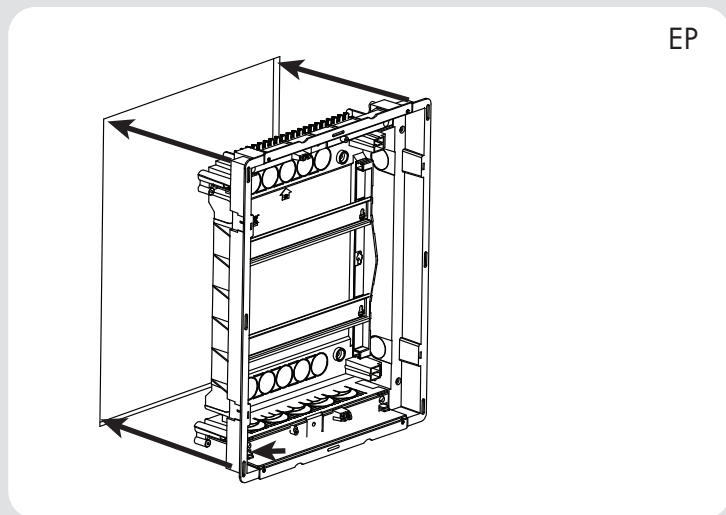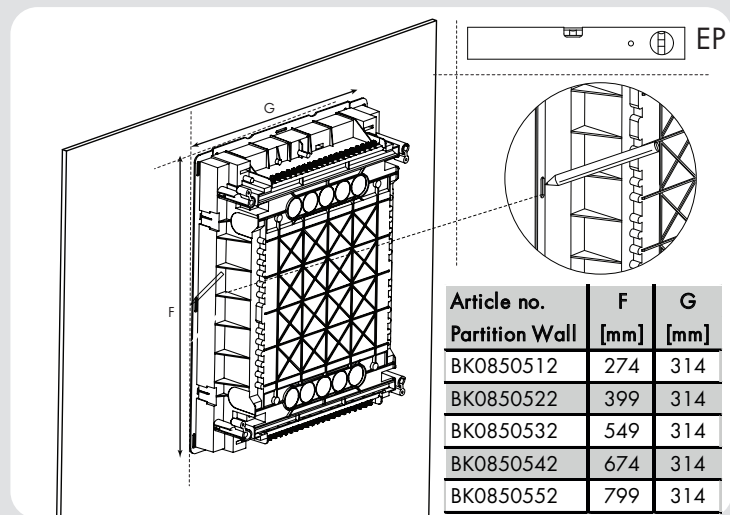


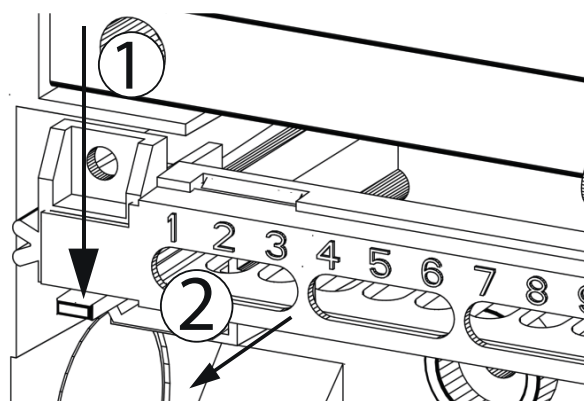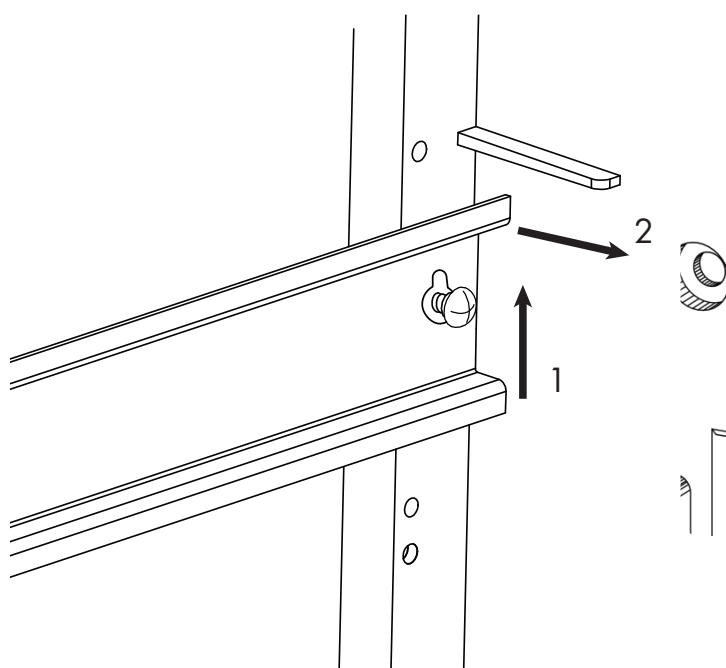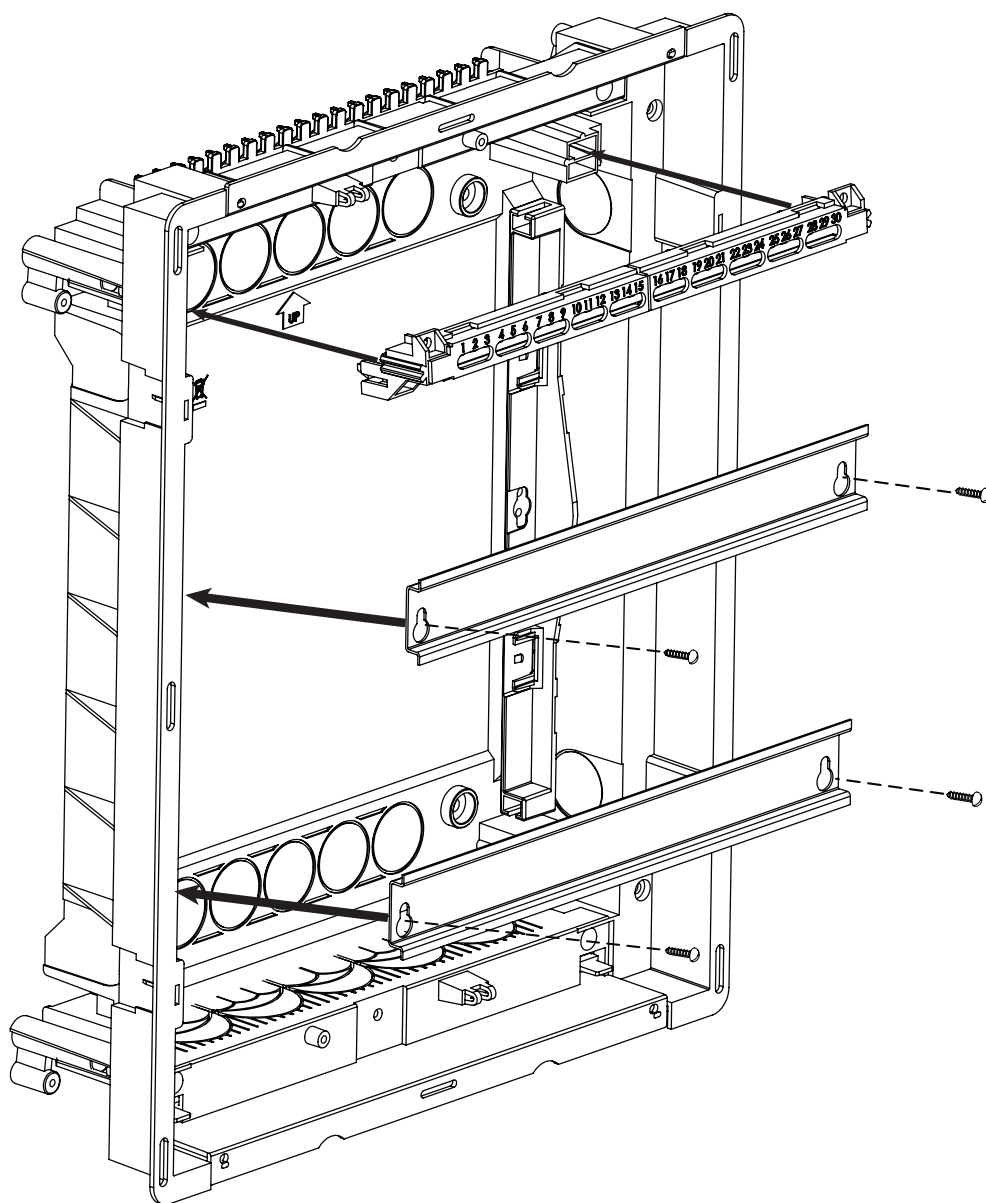

ES, EP

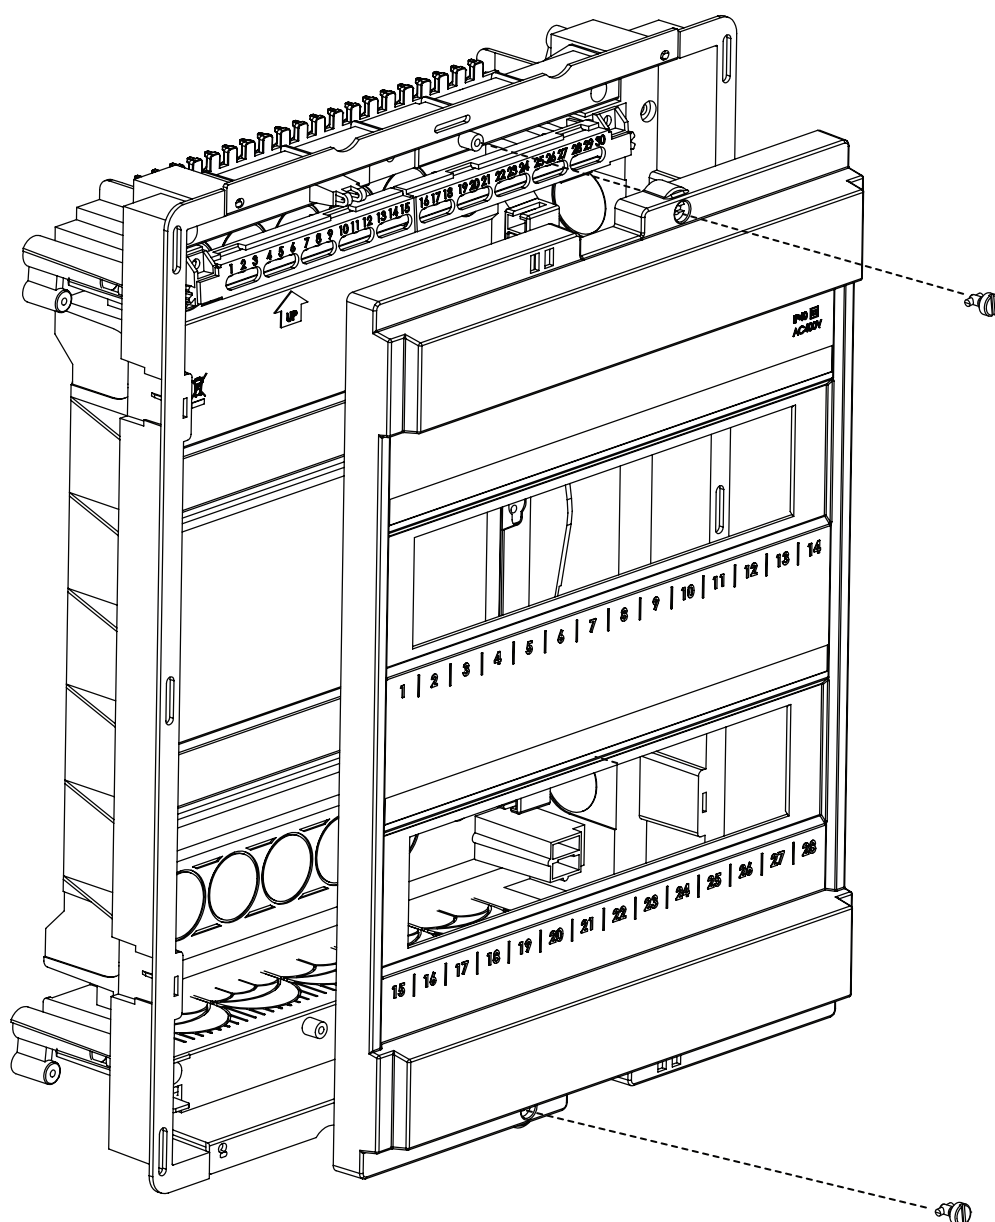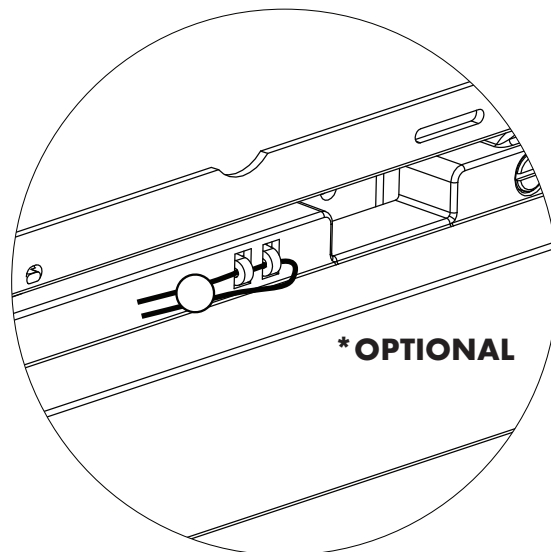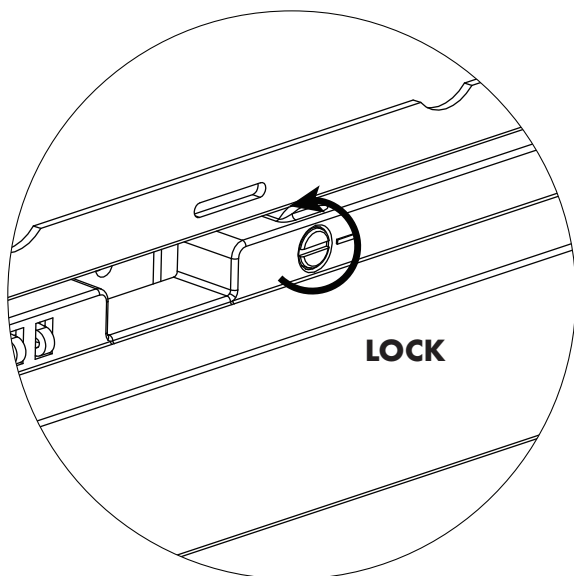


ES, EP

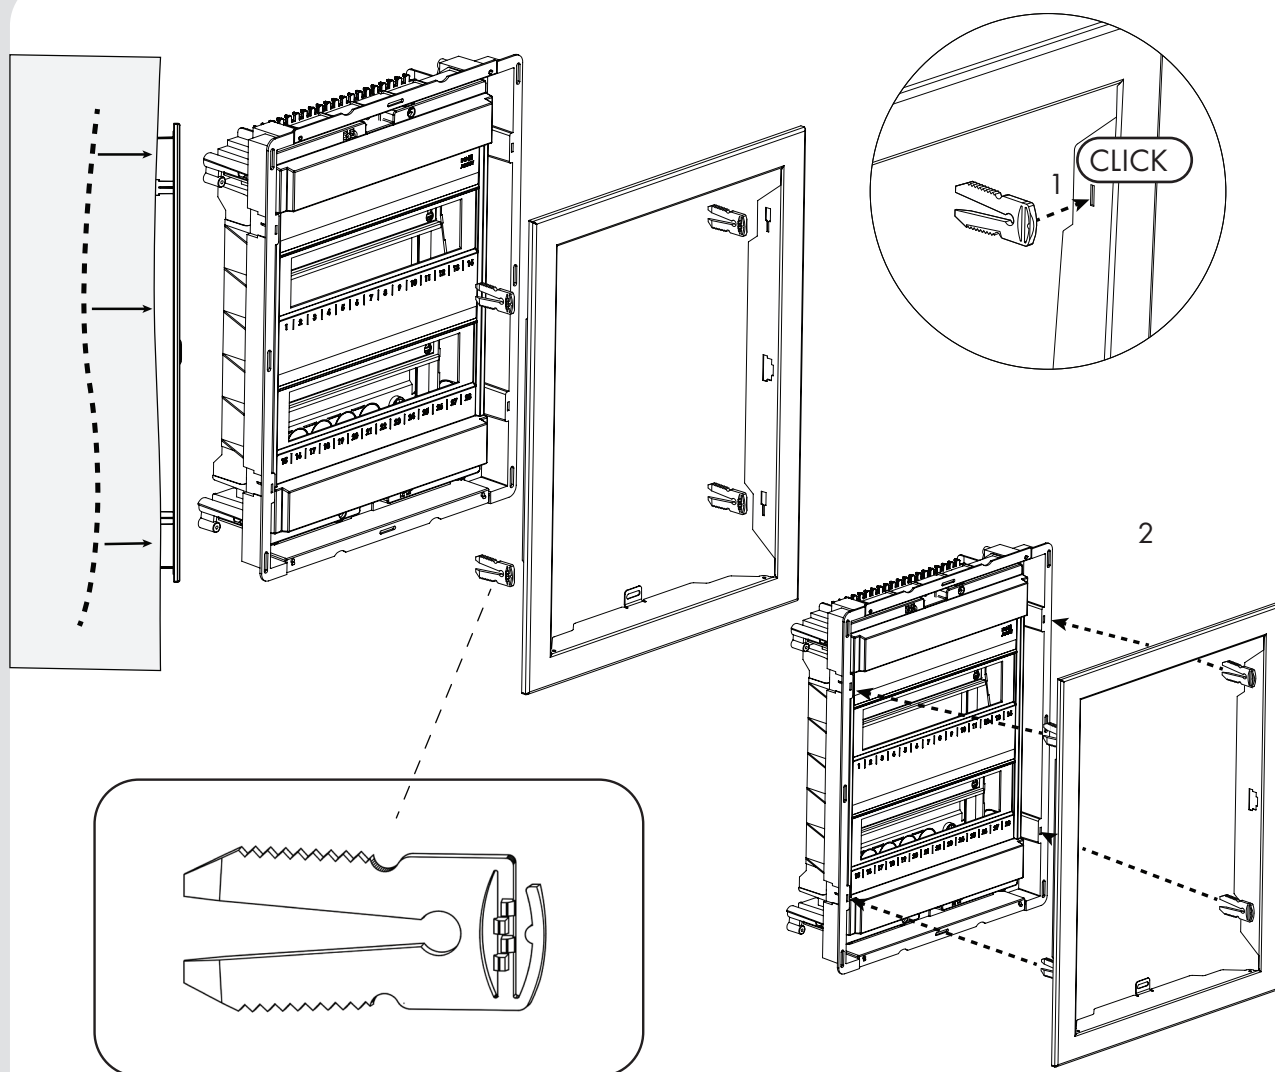


4-Point Connection

OR







2-Point Connection

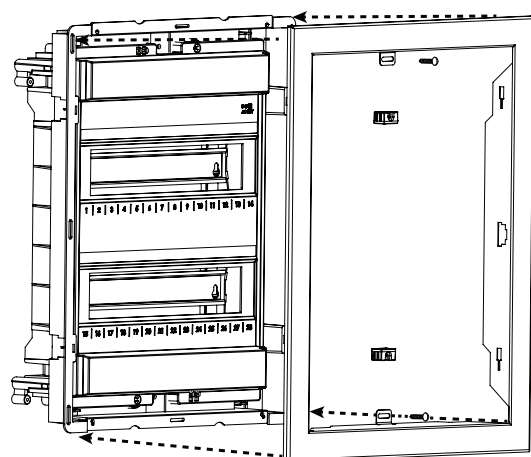


Door Stopper

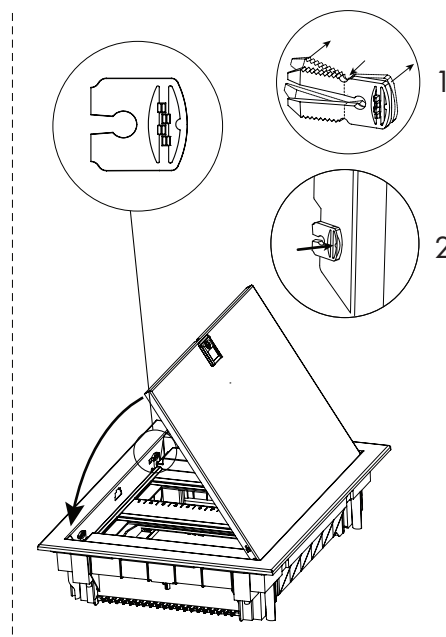

ES, EP

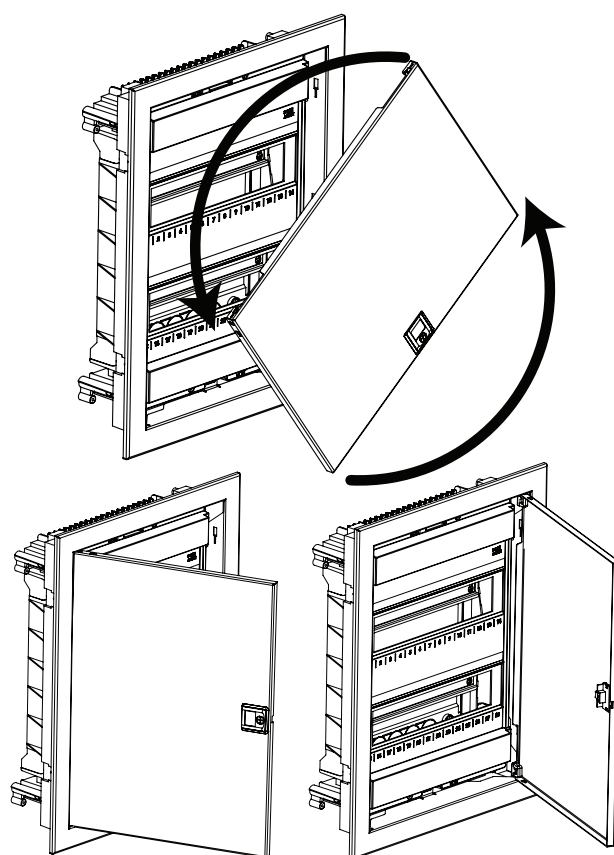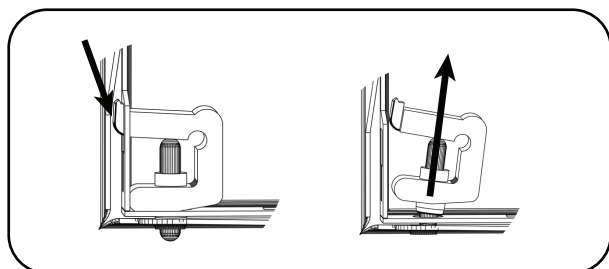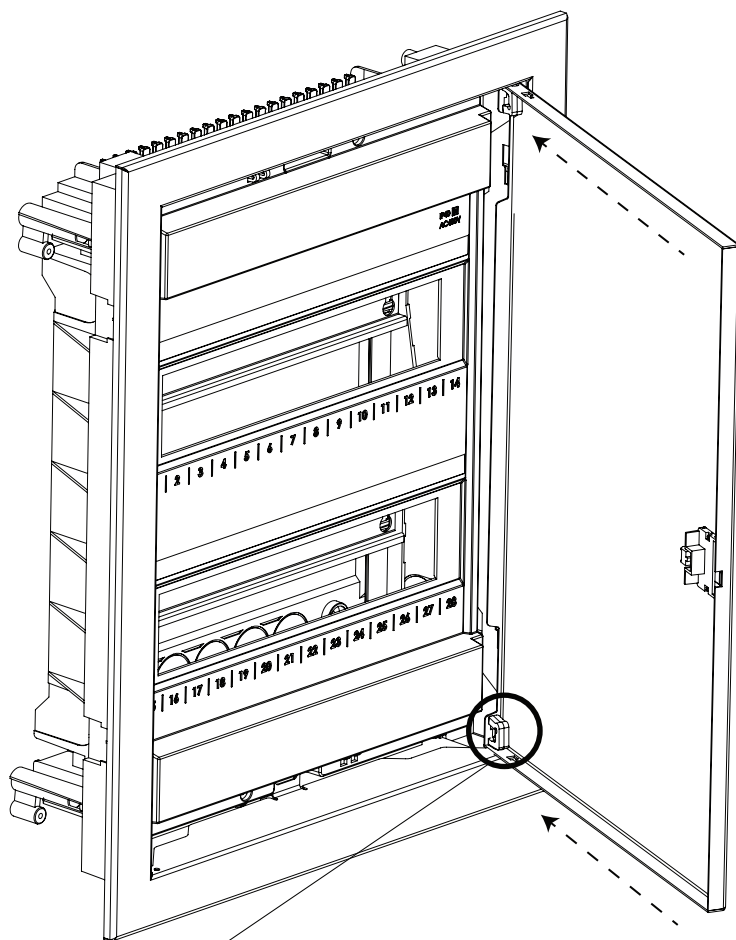

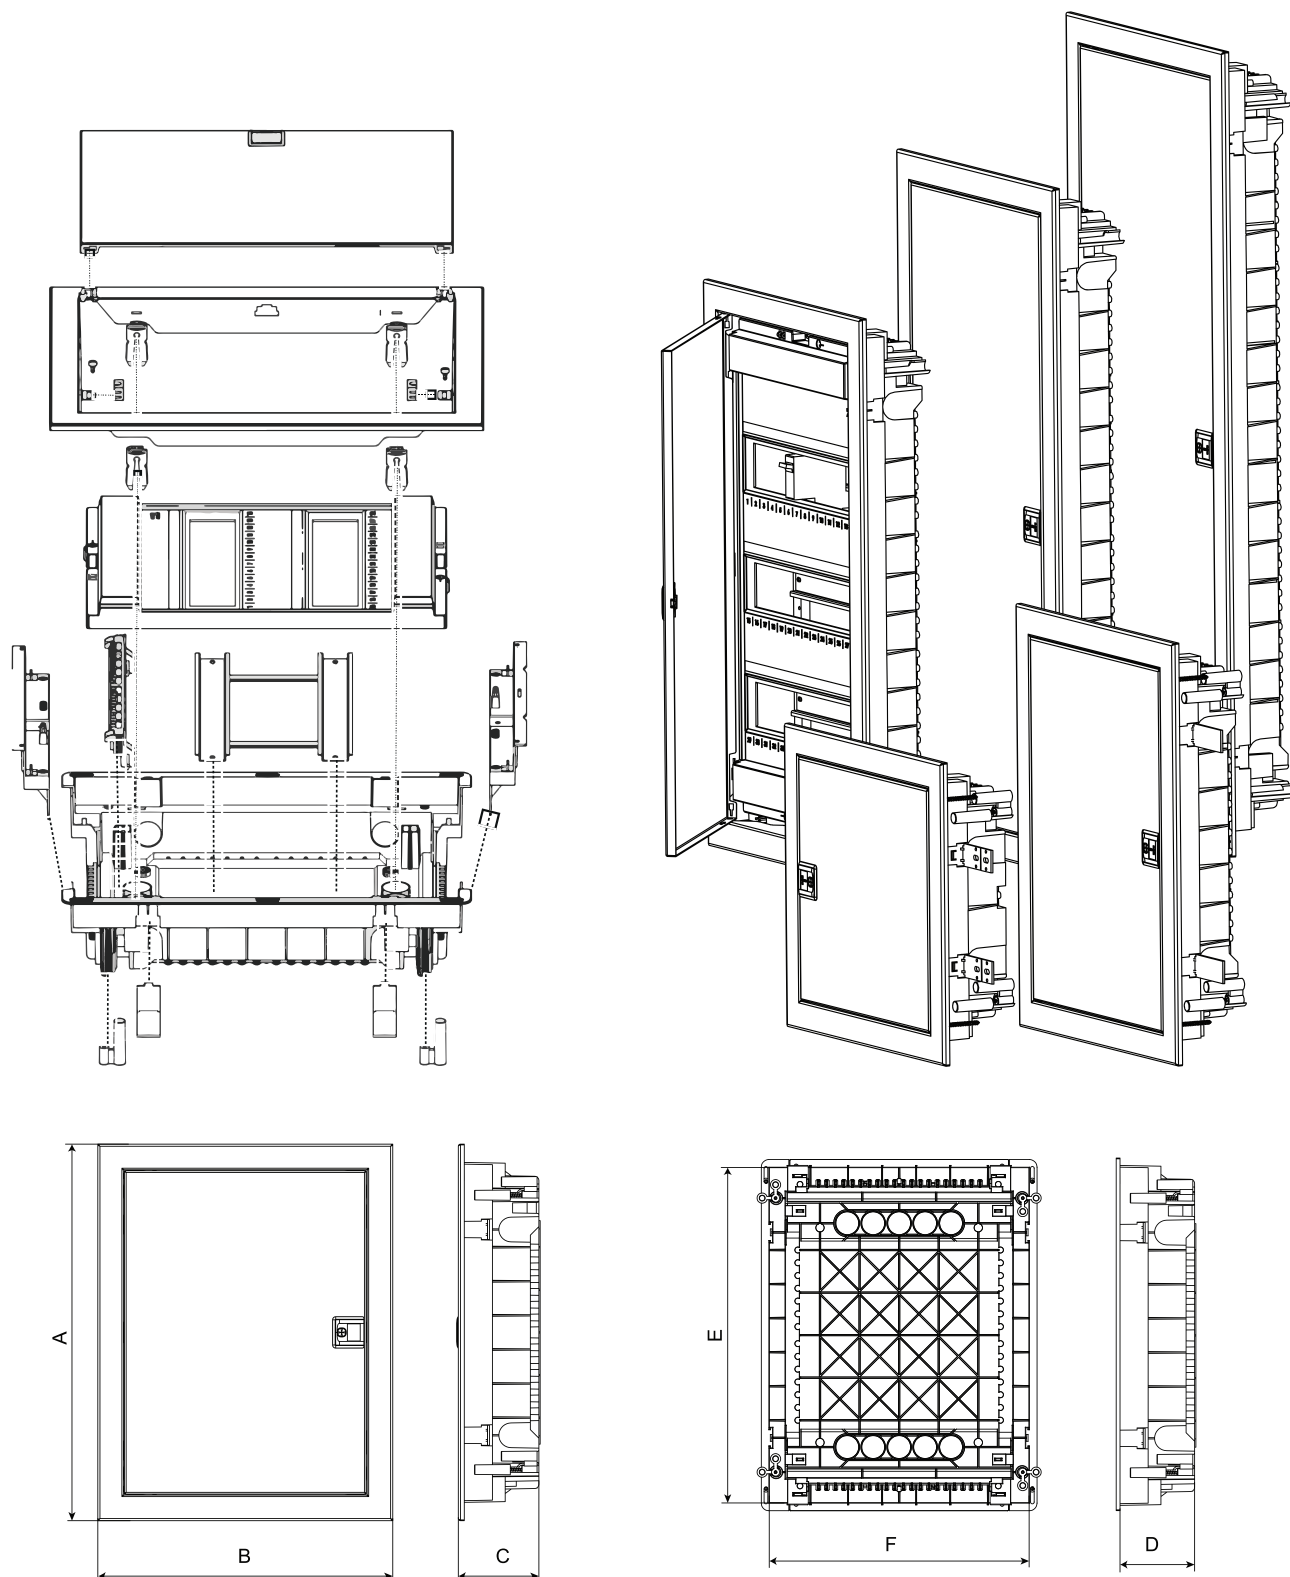

Article number		A	B	C	D	E	F	Rows	MW	Radiant power loss [W] *
Solid Wall	Partition Wall	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
BK0850012	BK0850512	317	346	95	87	274	306	1	12+2	-25
BK0850022	BK0850522	442	346	96	89	399	306	2	24+4	-34
BK0850032	BK0850532	592	346	96	89	549	306	3	36+6	-45
BK0850042	BK0850542	717	346	96	89	674	306	4	48+8	-54
BK0850052	BK0850552	842	346	90	87	799	306	5	60+10	-62

*Max. radiated power of housing calculated as a flush-mounted single fixed with $\Delta T = 35K$.

For indoor locations ($\leq 50\%$ RH at max. $+40^{\circ}C$ or for example 90% RH at $+20^{\circ}C$)

Temperature range: $-25^{\circ}C...+60^{\circ}C$; Rating Voltage 400V AC; IP40; Class II; IK08

According to IEC 60670; IEC 62208